


Normally Open Thermal Actuator

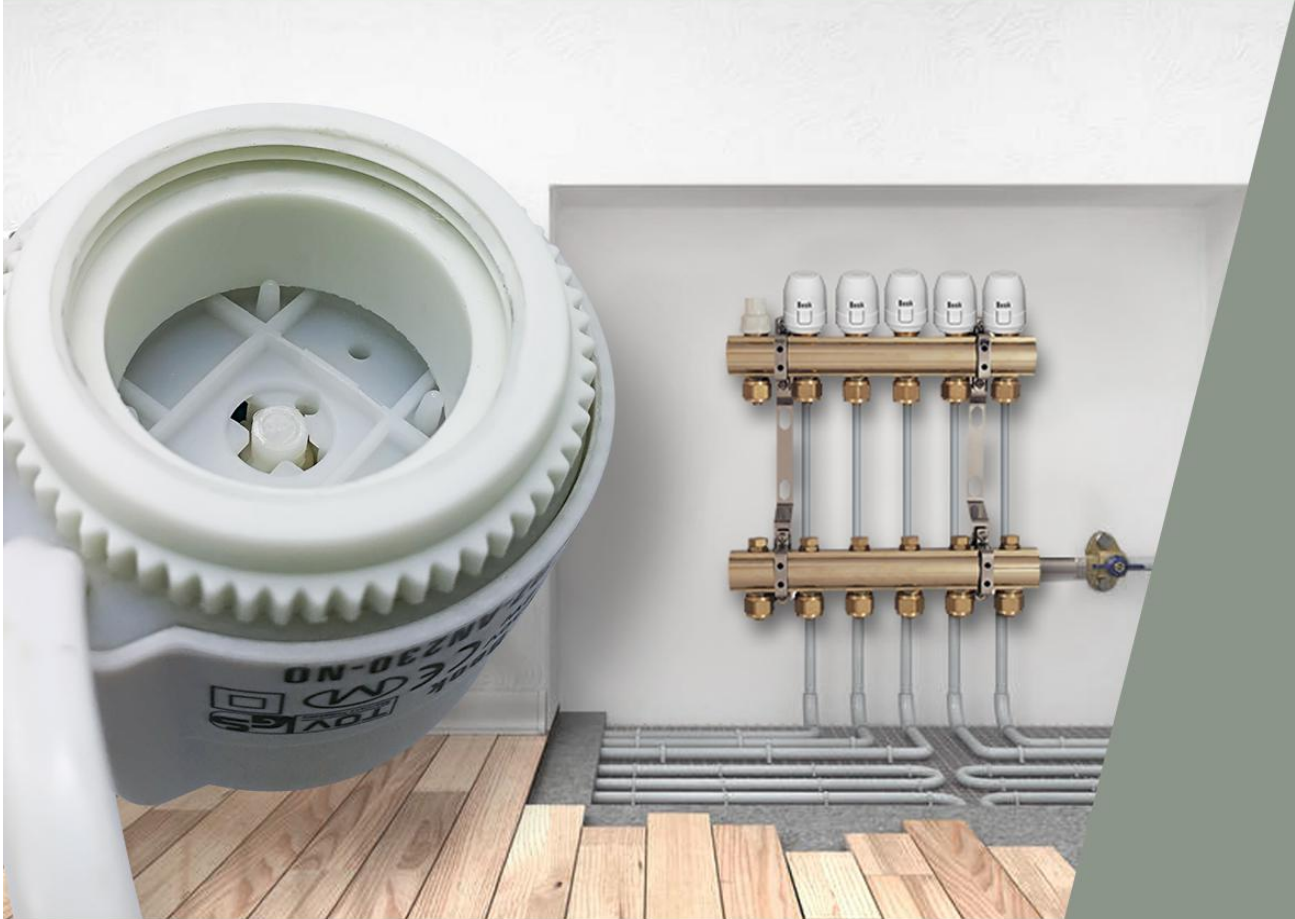

Normally Open Thermal Actuator

Product Catalog

 <http://www.beok-controls.com/>

 shine.wang@beok-controls.com

 Room.301-302,Block A,No.5 Shenwang Road,
Minhang District,Shanghai,China

Contact Person: Shine .Wang
Tel: +86-21-33880317 Fax: +86-21-33880753
Email: shine.wang@beok-controls.com
Web: www.beok-controls.com

CONTENT

NOEMALLY OPEN THERMAL ACTUATOR

RZ-AN 230(24) NO Thermal ActuaI 3

RZ-D10 230 NO Thermal Actuator 3

CERTIFICATES 4

FACTORY 5

NOEMALLY OPEN THERMAL ACTUATOR



RZ-AN 230(24) NO

Working Voltage: 230VAC $\pm$ 10%
 Initial Current: About 50MA
 Power Consumption: 2W
 Working mode: NC
 Protection Grade: IP41
 Screw Thread: M30*1.5mm
 Working Journey: $\leq$ 3.5mm
 Working Temperature: -20~ 50 °C
 Storage Temperature: -20~50 °C
 Security Class: II(Double Insulation)
 Cable Length: 80cm
 Running Time: 180seconds (open-closed)



RZ-D10 230 NO

Working Voltage: 230VAC $\pm$ 10%
 Initial Current: About 50MA
 Power Consumption: 2W
 Working mode: NC
 Protection Grade: IP54
 Screw Thread: M30*1.5mm
 Working Journey: 4mm
 Working Temperature: -5~ 60 °C
 Storage Temperature: -20~50 °C
 Security Class: II(Double Insulation)
 Cable Length: 72cm
 Running Time: 180seconds (open-closed)



CERTIFICATES

Certificates of Beok

ROHS



RED



CE-LVD



CE-EMC



Our Factory

